


# Category 5E Direct Burial Shielded Outdoor Cable

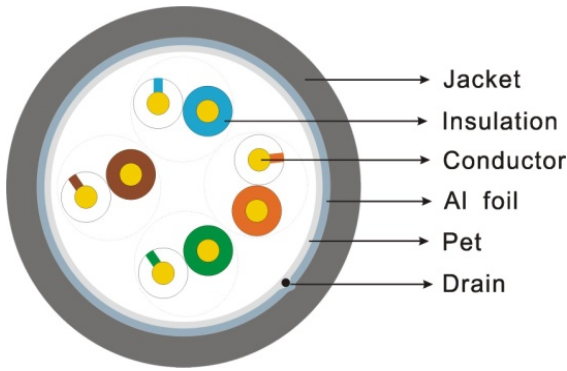

### Description

24 AWG Direct Burial Shielded Outdoor High Performance Cable

### Applicable Standards

- ETL Listed Type CMX
- C(ETL) listed CMX
- ETL Verified to TIA - 568-C.2, and ISO/IEC 11801
- ROHS Compliant
- ATM 155 Mbps
- Ethernet 10BASE-T, 100BASE-TX, 100BASE-VG, 100BASE-T4,
- 1000 Mbps 100BASE-T Gigabit Ethernet™ (IEEE 802.3)
- 16 Mbps Token Ring™ (IEEE 802.5)

### Physical Characteristics

Number of Conductor Pairs	4
Size	24 AWG
Stranding	Solid
Conductor Material	Solid Annealed Bare Copper
Shield Material	AL Foil
Rip Cord	Yes
Insulation Material	HDPE
Insulation Overall Diameter	0.040 in. ± 0.0002 in.
Insulation Average Thickness	0.0081 in.
Jacket	LDPE
Outer Jacket Average Wall Thickness	0.021 in.
Outer Jacket Nom. O.D.	0.244 in. ± 0.008 in.
Nominal Weight	27 lbs.

### Mechanical Characteristics

Temperature Rating	Installation	-40° to + 75°C
	Operating	-40° to + 75°C
Tensile Strength	Before	≥ 19 Mpa
	Aging	≥ 300%
Elongation		100°C x 96 hours
	After	≥ 80% of unaged
Aging Condition		≥ 50% of unaged
	Aging	

### Color Code

Pair 1	White/Blue	Blue
Pair 2	White/Orange	Orange
Pair 3	White / Green	Green
Pair 4	White / Brown	Brown

### Cable Marking

CATEGORY 5E 350MHZ 24AWG 4 PR FTP UV RATED OUTDOOR DIRECT BURIAL XXXXXXX C(ETL)US \*\*\*\*FT

### Electrical Performance

Frequency (MHz)	Attenuation (dB/100m)	Return loss (dB)	NEXT (dB)	PS-NEXT (dB)
	Max.	Min.	Min.	Min.
1	2.04	20.00	65.30	61.00
4	4.05	23.01	56.27	48.96
10	6.47	25.00	50.30	41.00
16	8.25	25.00	47.24	36.92
20	9.27	25.00	45.78	34.98
25	10.42	24.32	44.33	33.04
31.25	11.72	23.64	42.88	31.10
62.5	16.99	21.54	38.36	25.08
100	21.98	20.11	35.30	21.00
350	44.85	16.30	27.14	10.12

Frequency (MHz)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)	Delay (ns/100m)	ACR (dB)
	Min.	Min.	Max.	
1	64.00	61.00	570.00	62.90
4	51.96	48.96	552.00	51.37
10	44.00	41.00	545.38	42.50
16	39.92	36.92	543.00	37.34
20	37.98	34.98	542.05	34.68
25	36.04	33.04	541.20	31.83
31.25	34.10	31.10	540.44	28.78
62.5	28.08	25.08	538.55	17.96
100	24.00	21.00	537.60	8.90
350	13.12	10.12	535.92	-17.71

\* Values above 100MHz are information only

### Electrical Characteristics

Maximum Conductor DC Resistance @ 20°C	≤ 9.5 Ω/100 Meters
Maximum DC Resistance Unbalanced @ 20°C	≤ 2.5%
Maximum Pair-to-Pair Ground Capacitance Unbalanced	≤ 330 pF/100 Meters
Characteristic Impedance (1 ~ 350 MHz)	100 ± 15 Ω
Mutual Capacitance	≤ 5.6 nF/100 Meters
Maximum Delay Skew	≤ 45 nS/100 Meters

### Part Numbers

Part #	Color	Put-up
5ESOSP BK -2	Black	1,000' Reel