

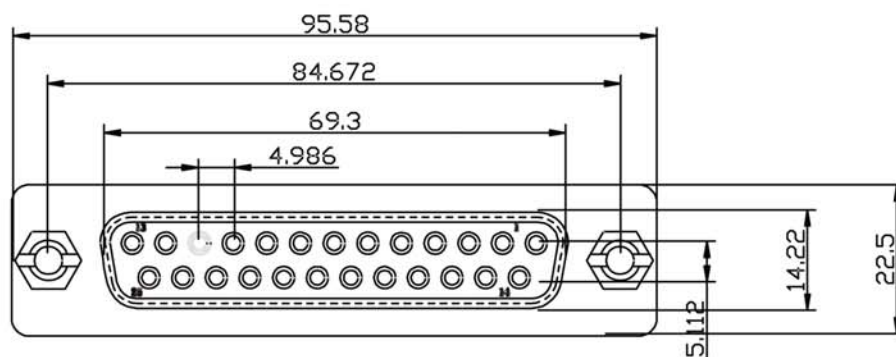
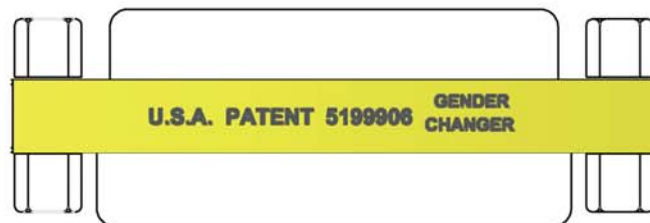


Product Name	DB 25 Female to female adapter
Product Numbers	10GC-G3

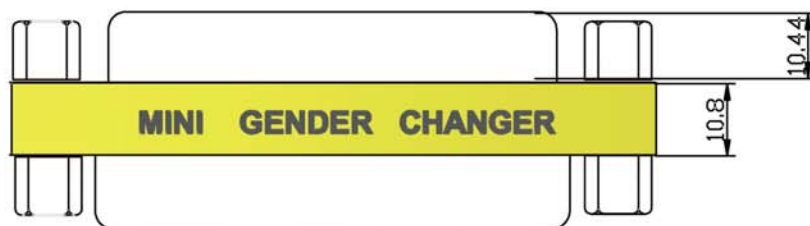

UNC #4-40 Hexscrew

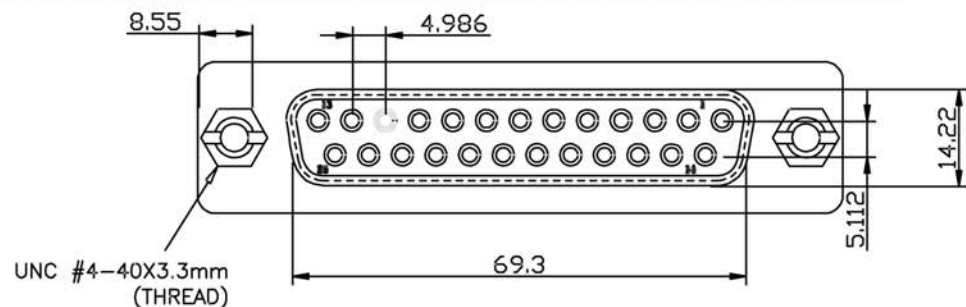

PIN ASSIGNMENT

DGC 25 F/F GENDER CHANGER

PIN OUT: 25Female

25Female

1	-----	1
2	-----	2
24	-----	24
25	-----	25
G	-----	G

Specification:

Rating Current: 3 AMP

Insulation Resistance: 1000M Ohm min. at 500V DC

Dielectric Strength: 1000V AC for one minute.

Temperature: -55°C~+105°C

Contact: Brass Gold flash over Nickel Plated

Shell: SPCC Nickel Plated

Insulator: PBT+30%GF UL94V-0 Blue

Screw: Steel 12L14 Nickel Plated

Label: Yellow color black character

One Side: MINI GENDER CHANGER

Other Side: U.S.A PATENT 519906

GENDER
CHANGER

REV.		DESCRIPTION				DATE		
		TOLERANCE		SFCABLE.COM				
		INCHES	M/M					
		.X	.015					.30
		.XX	.010					.10
		.XXX	.005	.05	TITLE: 10GC-G3			
DRAWN BY		Dawson		DB 25 Female to female adapter				
CHECK BY				SCALE	NONE	DRAWING NO:		REV. A
				UNIT	MM			
APPD BY				DATE	2013.03.08			