


Pin Assignment

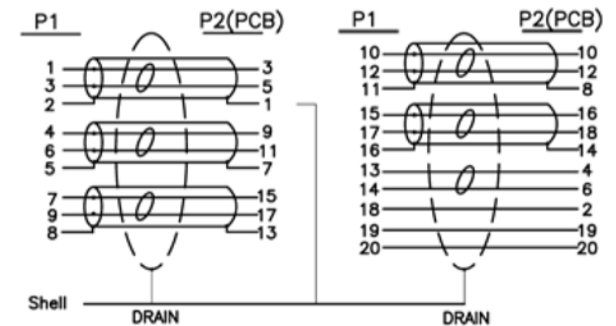

Electrical Test:

1. 100%Test(Open, short, miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot: 100V DC/10ms

9	Dust Cover For DVI Connector	1	pcs
8	Dust Cover For DP Connector	1	pcs
7	Screw: #4-40UNC(2.8*58.25MM) Nickel Planted	2	pcs
6	Copper Foil 360' Solder Type	2	pcs
5	Inside Molding: PE	5	g
4	S.R. Molding 45P PVC, Colocr: Black	18	g
3	DP to DVI Converter With DVI Male, PCB+SMT, DVI Pin Gold Planted, Shell Gold Flash	1	set
2	Display Port Male, Insulation: Black, Material: LCP, Pin Gold Plated, Shell Gold Flash With ABS Plastic Hood	1	Set
1	Display Port Cable UL20276 [28AWG(7/0.127TC)*1P+D.W+AL+Mylar]*5+28AWG(7/0.127TC)*5C+AL/MY+D.W+BD+Jacket PVC Color: Black OD:7.3±0.2mm	L	M
NO	DESCRIPTION	Q'TY	UNIT

		TOLERANCE		SF Cable, Inc. 888-275-8755	
		INCHES	M/M		
.X		.015	.30	<b>TITLE:</b> DisplayPort TO DVI(24+1) M/M 28AWG <b>CUSTOMER :</b> <b>CUSTOMER P/N :</b> 10SF-DPDI-XX <b>SCALE</b> NONE <b>UNIT</b> MM <b>DRAWING NO.:</b> REV. A 1/1	
.XX		.010	.10		
.XXX		.005	.05		
DRAWN BY		RICH		DATE 2011.05.13	
CHECK BY					
APPD BY					