
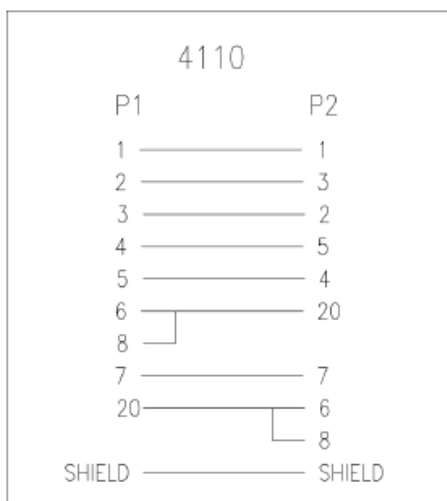


P:

M-Y424A

M-424A

Customer No: No.1

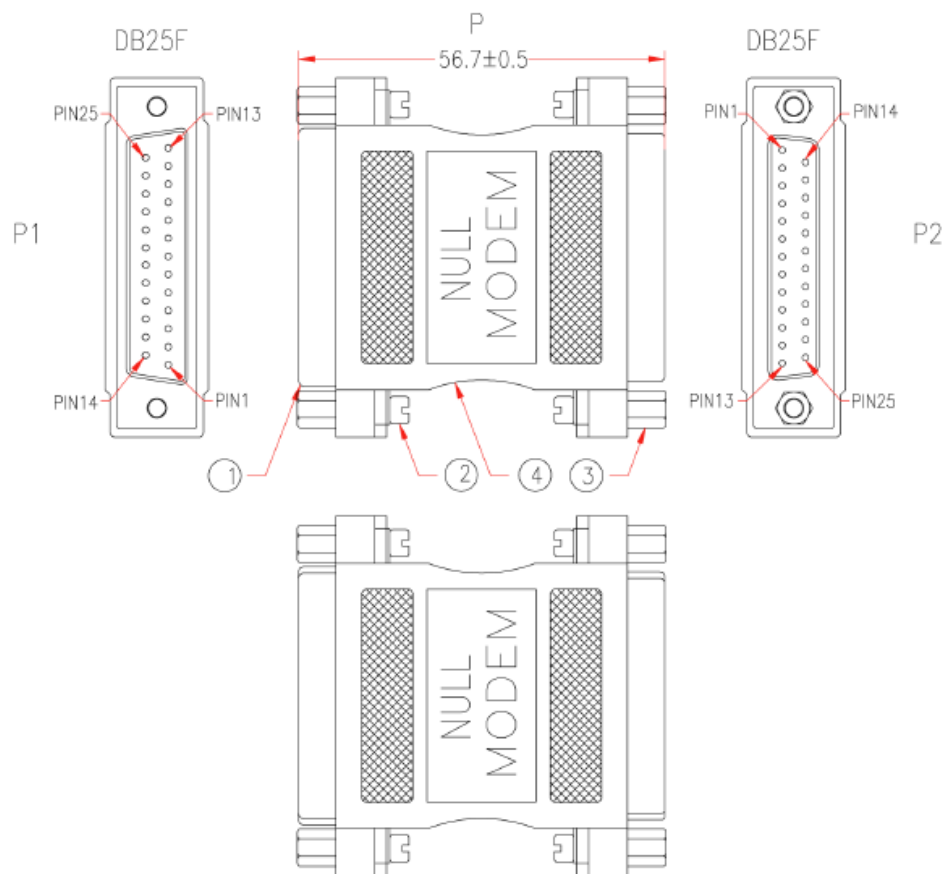

NOTE: All relevant materials are complied with RoHS directive .

4	UL1061 26AWG INSULATOR, LENGTH 47mm(10pcs) AND 55mm(1pcs), DRAWING No. EH002601C-013	H5SE06-0304	11	M304
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
3	HEX-NUT 5*6.6mm	A6BC02-0095	4	M95
2	SCREW 4*12.5mm, #4-40, WITH PAD	A6AA04-0095 A6CA01-0187	4	M95
1	DB25 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AE03-0108	2	M108
No.	DESCRIPTION		Q'TY	Supplier

APPROVED		<p>SFCable.com 1-888-275-8755</p>	Cable Length Unless Other Spec. Tolerances:	0 ~200mm ±10mm	201~1000mm ±20mm	1001 ~1500mm ±25mm	1501~2100mm ±30mm	2100mm↑ ±40mm
CHECKED	HU		UNIT:mm					
DRAWING	JIANG							
DATE	21/MAR/12	ITEM NO.	30D3-B3					