


P: M-Y467A
M-467A

Customer No.: No. 1

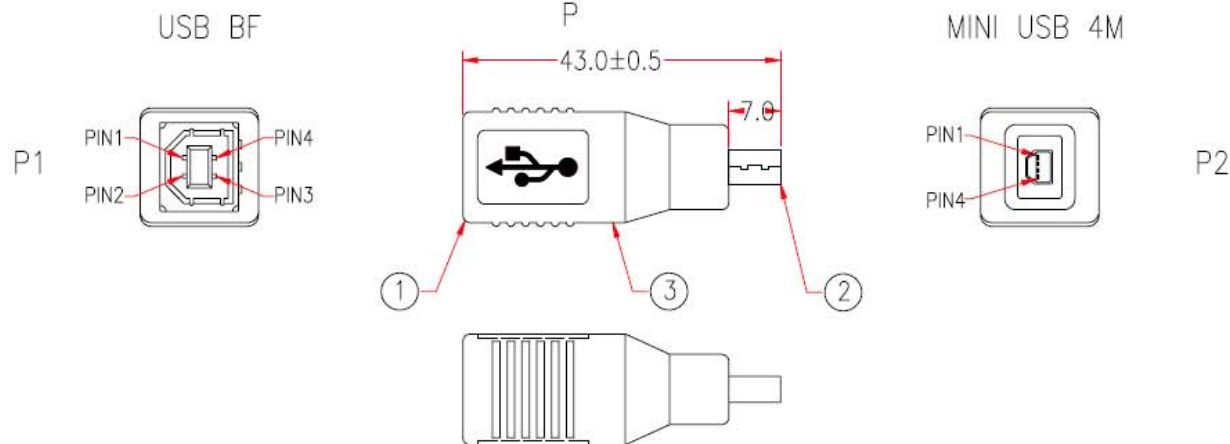

NOTE: All relevant materials are complied with RoHS directive .

PIN ASSIGNMENT	
P1	P2
1 _____	1
2 _____	2
3 _____	3
4 _____	4
SHIELD _____	SHIELD

3	UL1007 30AWG INSULATION WIRE, LENGTH 25mm, DRAWING No.EH003001C-023	5	M304
	BLACK HEAT SHRINK TUBE ϕ 1.0*8mm	5	M519
	COPPER FOIL 20*50mm	1	M379
	MOLDED PE COLOR TRANSPARENT		TWN
	MOLDED PVC BLACK		M304
2	MINI USB 4P MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR, MISTUMI TYPE	1	M108
1	USB B FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATION	1	M108
No.	DESCRIPTION	Q'TY	Supplier
APPROVED		 1-888-275-8755 Cable Length Unless Other Spec. Tolerances: 0 ~200mm \pm 10mm 201~1000mm \pm 20mm 1001 ~1500mm \pm 25mm 1501~2100mm \pm 30mm 2100mm \uparrow \pm 40mm	
CHECKED	TIAN		
DRAWING	SONG		
DATE	23/JUN/05	ITEM NO.	30U1-07300
	CHECKED	UNIT:mm	