



P: M-Y467A
M-467A

Customer No.: _____

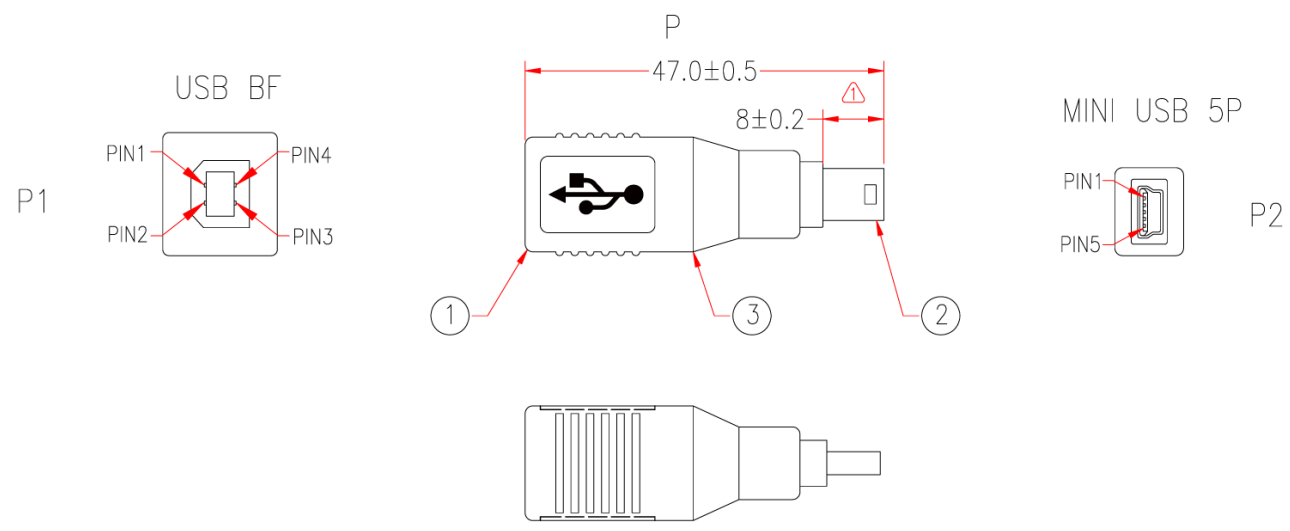

* NOTE: All relevant materials are complied with RoHS directive .

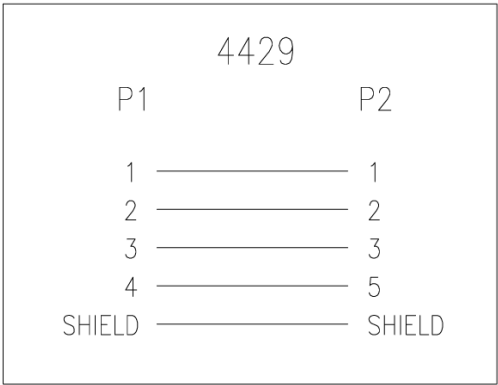

3	UL1007 30AWG INSULATION WIRE, LENGTH 25mm, DRAWING No.EH003001C-023	H5SA07-0304	5	M304
	BLACK HEAT SHRINK TUBE ϕ 1.0*8mm	A4HA23-0959	5	M959
	ALUMINUM FOIL 20*50mm	A6MA01-0579	1	M579
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BLACK	H1BF01-0304K09		M304
2	MINI USB 5P MALE ,GOLD FLASH ON CONTACTS, BLACK INSULATOR, SOLDER FOUR PIECES TYPE	A1HE09-0471	1	M471
1	USB B FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATION	A1HD01-0108	1	M108
No.	DESCRIPTION		Q'TY	Supplier

APPROVED		1-888-275-8755	Cable Length Unless Other Spec. Tolerances: 0 ~200mm \pm 10mm 201~1000mm \pm 20mm 1001 ~1500mm \pm 25mm 1501~2100mm \pm 30mm 2100mm \uparrow \pm 40mm
CHECKED			
DRAWING	ZHU		
DATE	2/JUL/14		
ITEM NO.	30U1-08300	UNIT:mm	