
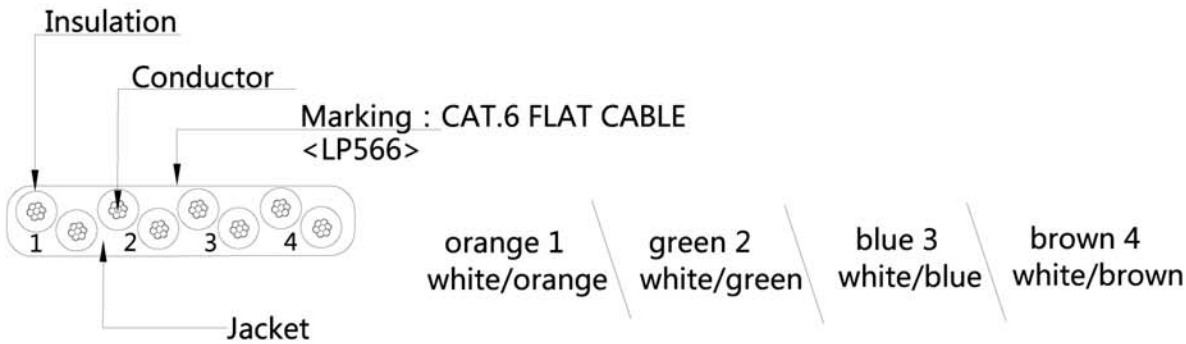


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/0	2014/9/15	Sally	NEW
A/1	2014/9/25	Sally	Change MOLDING to Molded Change 1007XXYY to 10073XXYY

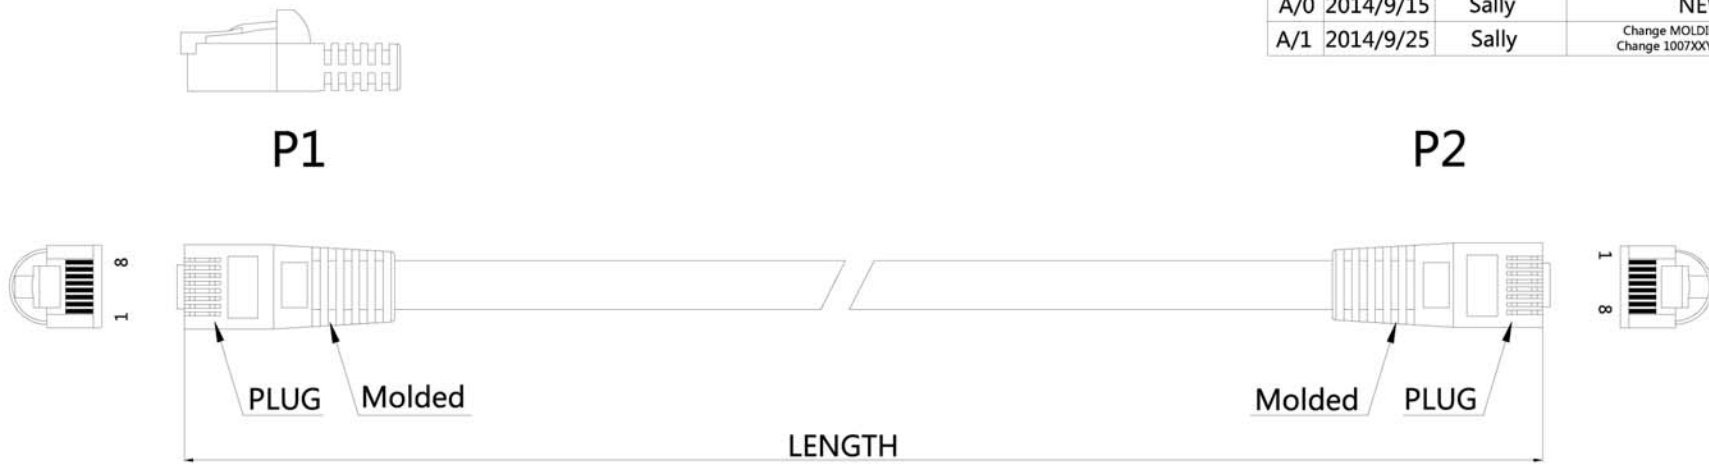

Length (Ft)	Tolerance (+/- inch)	Tolerance (%)	Length (Ft)	Tolerance (+/- inch)	Tolerance (%)
0.5	0.6	10.00%	9	2	1.85%
1	1.2	10.00%	10	2	1.67%
1.5	1.2	6.67%	12	2	1.39%
2	1.2	5.00%	15	3.15	1.75%
3	1.2	3.33%	20	4	1.67%
4	1.2	2.50%	25	4	1.33%
5	1.2	2.00%	30	6	1.67%
6	1.2	1.67%	35	6	1.43%
7	2	2.38%	40	6	1.25%
8	2	2.08%	50	6	1.00%

Conductor	Bare Copper 32AWG
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.54±0.01mm
Jacket/PVC	Thickness:MIN at any point:0.20mm MAX AVG:0.58mm Diameter:1.6×5.8±0.1mm
Wire	FLAT CAT.6 UTP 32AWG*4P
Plug	8P8C 50u" YU-21
Color	black
PAPT NAME	SPECIFICATION DESCRIPTION

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

sfcable.com

DRAWN BY	Sally	DATE:	2014/9/25	DESCRIPTION:	FLAT CAT.6 UTP 32AWGX4P YU-21 L-903
CHECKED BY		SHEET	1 of 1	ITEM NO.	CAT6-FW-XX
APPROVED BY		SCALE	1:1	REV.	00
		UNIT:	mm		