
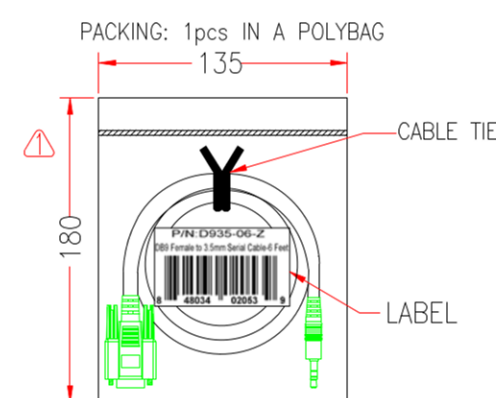
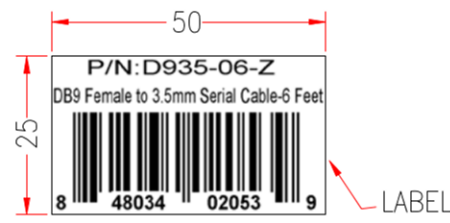


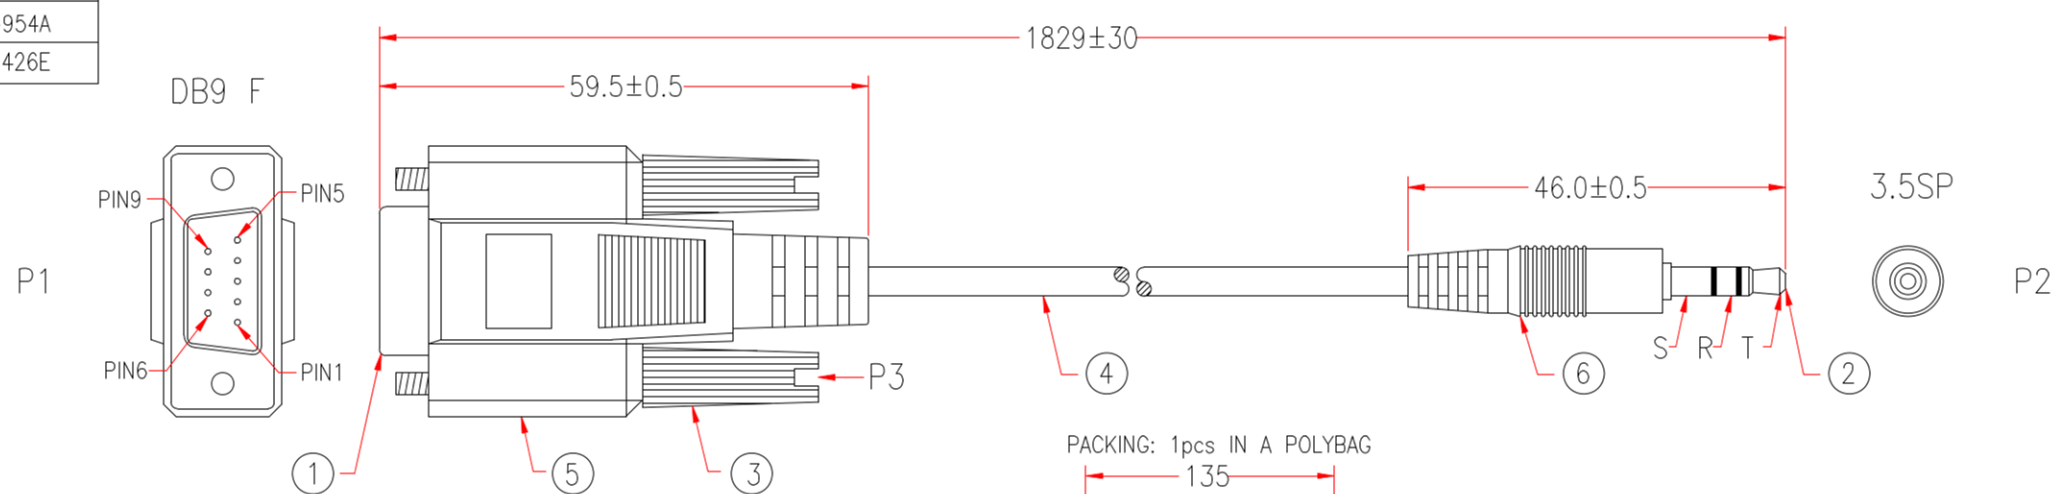

9L89			
P1	P2		
1			
6			
7			
8			
2	_____	T	YELLOW
3	_____	R	BLUE
5	_____	S	DRAIN

*NOTE: All relevant materials are complied with RoHS directive .

6	MOLDED PVC BLACK	H1BF01-0304K09		M304
5	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BLACK	H1BF01-0304K09		M304
4	NON-UL 2C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 3.5mm, JACKET BLACK, DRAWING NO. EMAL2802C-1397		1810mm	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BLACK	A6AA30-0095	2	M95
2	DC 3.5 STEREO PLUG, GOLD PLATING ON PLUG	A1PA14-0518	1	M518
1	DB9 FEMALE,GOLD FLASH ON CONTACTS,BLACK INSULATOR	A1AA02-0108	1	M108
No.	DESCRIPTION		Q'TY	Supplier

APPROVED

CHECKED HU

DRAWING JIANG

DATE 13/JUN/14

Cable Length Unless Other Spec. Tolerances:

0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm

UNIT:mm