

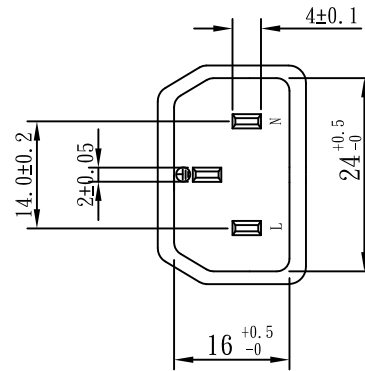
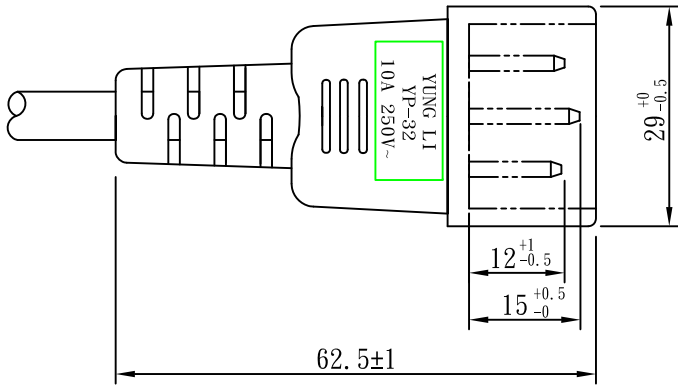
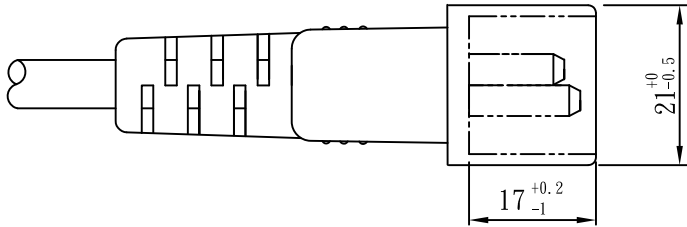
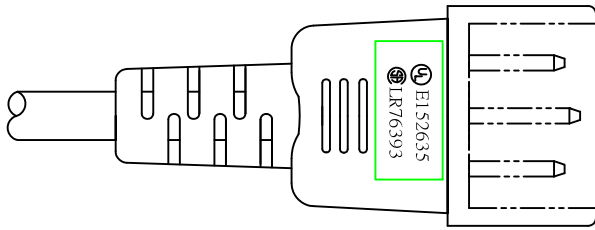
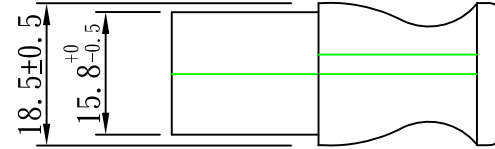
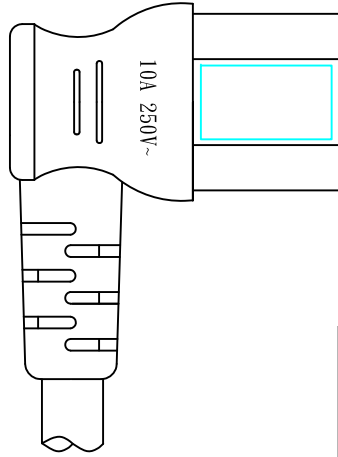


NO.	SPECIFICATION	Q' TY	REMARK
1	SVT 18/3C 105°C BLACK	1PC	
2	YP-32 PVC PLASTIC:35P BLACK	15g/PC	
3	TERMINAL:98672BS-1	3PCS	
4	H. S. G: 2X4 BLACK	1PC	
5	TER:97740BS-0	3PCS	
6	YC-12L INNR BODY	1PC	
7	YC-12L PVC PLASTIC:35P BLACK	18g/PC	

TOLERANCE >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	APPROVED		DATE		<b>SF Cable, Inc.</b> 888-275-8755				
	CHECKED		DATE						
	DRAWN	SUKI	DATE	15.04.10	CUSTOMER				
	TYPE	YP-32/YC-12L(Right)			P/N	P7ME-RAXX			
	DRAWING NO.	CY-U5203		REV	B	MATERIAL	P. V. C	UNIT	mm
	SCALE								

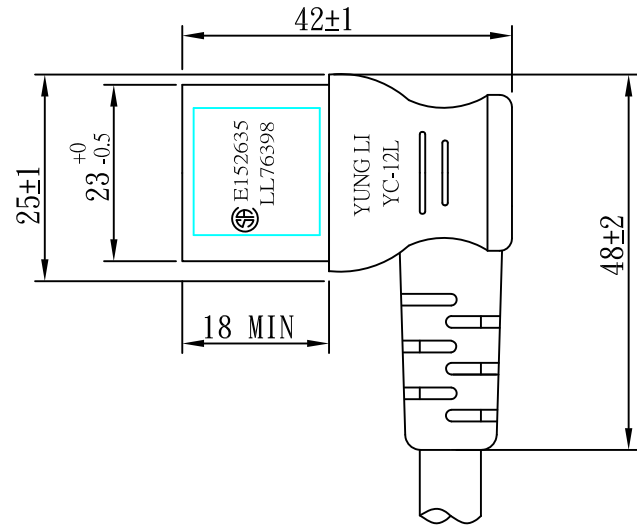

TOLERANCE >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	APPROVED		DATE					
	CHECKED		DATE					
	DRAWN		DATE		CUSTOMER			
	TYPE	YP-32			P/N			
	DRAWING NO.	CY-P32U10A	REV	B	MATERIAL	P. V. C	UNIT	mm
				SCALE	1:1			

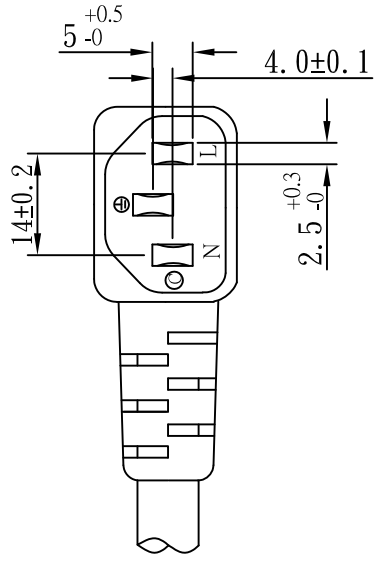

TOLERANCE >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	APPROVED		DATE					
	CHECKED		DATE					
	DRAWN		DATE		CUSTOMER			
	TYPE	YC-12L(10A)			P/N			
	DRAWING NO.		REV	B	MATERIAL	P. V. C	UNIT	mm
				SCALE	1:1			