




Security Stranded Cable 22 AWG / 4 Conductor

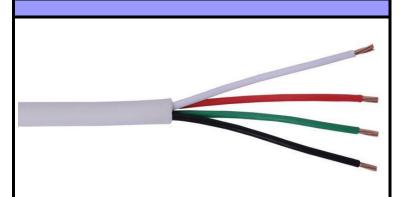

Description

22/4 Stranded Bare Copper CMR Security Cable

Applicable Standards

- Class 2 Power Limited Circuit Cable and Communications
- Cable for General Purpose Applications

| • | | | |
|--|---------------------|--------------------------|--------|
| Phys | sical Characteri | stics | |
| Conductor | | Stranded Bare Copper | |
| Number of Conductors | | 4 | |
| AWG | | 22 | |
| Insulation | | | PVC |
| | (in aboa) | 0.006 | |
| Avg. Thickness | (inches) | | |
| Insulated Conductor Dia. | (inches) | 0.041 | |
| Jacket | | FR-PVC | |
| Avg. Thickness | (inches) | 0.014 | |
| Overall Diameter | (inches) | 0.126 | |
| Nominal Weight | (pounds) | 16 | |
| - | Colors | | |
| Insulation Colors | | Green, Red, Black, White | |
| | Part Numbers | | |
| Part Number | Color | | Put-up |
| | Grey | 1,000' | Вох |
| | White | 1,000' | Вох |
| Cable Marking | | | |
| 22AWG 4 COND STRANDED XXXXXX CMR FT4 C(ETL)US ****FT | | | |